

SOLAR FILMS

SOL 112 SUN PROTECTION

INFORMATION



EXTERNAL APPLICATION

83% SUN PROTECTION
HEAT PROTECTION

TOTAL SOLAR ENERGY REJECTED :	83%
REFLEXION SOLAR ENERGY :	68%
SOLAR ENERGY TRANSMISSION :	8%
SOLAR ENERGY ABSORPTION :	24%
SOLAR FACTOR G :	17%
UV BLOCK :	99%
SUPPORT :	PET
ADHESIVE :	Polymer acrylic 19 gr/m2
PROTECTOR :	Siliconised PET 20 microns
THICKNESS :	80 microns
COLOUR :	Silver metallic
APPLICATION SIDE :	External
T° OF APPLICATION :	min, + 5°C
STANDARDS :	EUROCLASSES
FIRE RATING :	B-s1, d0
GUARANTEE :	5 years

DESCRIPTION

The SOL 112 has been designed to reduce heat and glare from the sun. The improvement in comfort is spectacular in premises flooded with sunlight. It is a real factor in improving comfort and saves energy when using air conditioning. 83% solar protection.



DIMENSIONS

BY ROLL :







1,52 x 10 m
30 m

METHOD OF APPLICATION

The surface to be bonded must be free from dust, grease or any other contaminant. Some materials, such as polycarbonate, can cause bubbling problems. A compatibility test is therefore recommended. Can be installed on plexiglass and polycarbonate.

PRODUCTION AND STANDARDS

In order to constantly improve our products, we may modify colours and manufacturing processes without prior notice. Before applying our films, we recommend that users ensure that they are suitable for the intended use and comply with current standards.


-  **SUSTAINABILITY** : 5 years for vertical applications in Central Europe.
-  **USE** : For all types of glazing.
-  **MAINTENANCE** : After 30 days with a standard cleaning solution (non-abrasive, ammonia-free, etc.). Do not use cleaning products that could scratch the surface.
-  **STORAGE** : 2 years from delivery. This film should be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet the highest standards, we recommend that you do not mix films from different productions.

APPLICATION

CAN BE INSTALLED ON :

-  **SIMPLE**
4 / 6 / 8 / 10 mm
-  **TOUGHENED**
-  **CLEAR DOUBLE GLAZING** < 1,20 M²

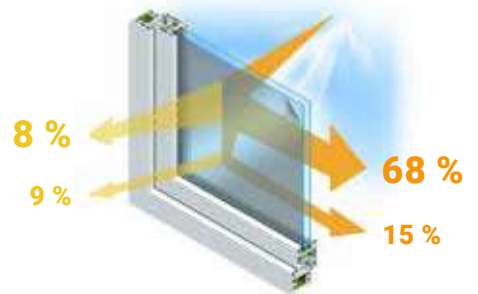

Application notes



SCAN ME

Video of the installation



SCAN ME